


## Debris Removal

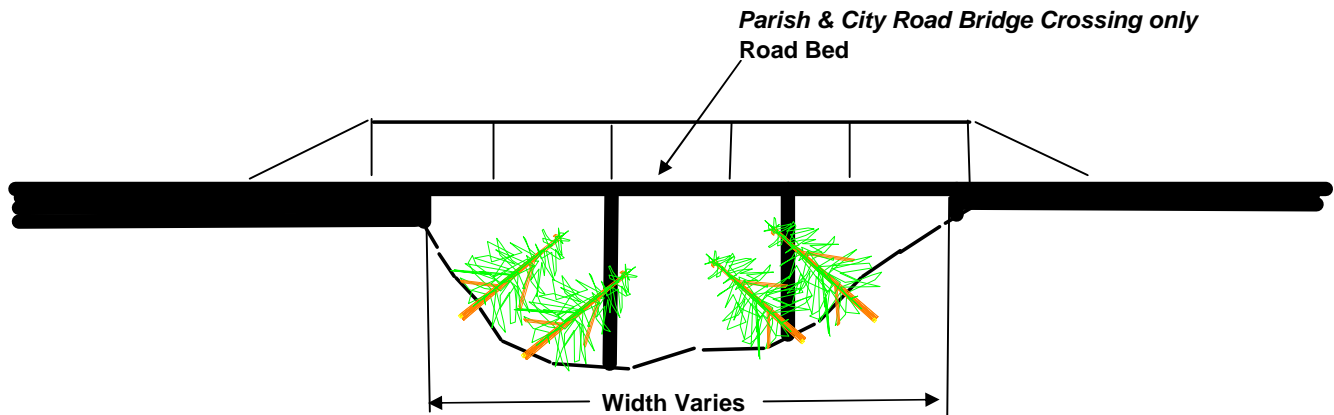

**Note:** Contract is to remove Debris from upstream and downstream Bridge which includes underside of bridge


**Exception:** All Crossing which cross State or Federal highways are not included in contract

## Typical Road Bridge Crossing Not to Scale

Notice:

96 Hours Before Digging  
Call 1-800-272-3020

## Debris Removal

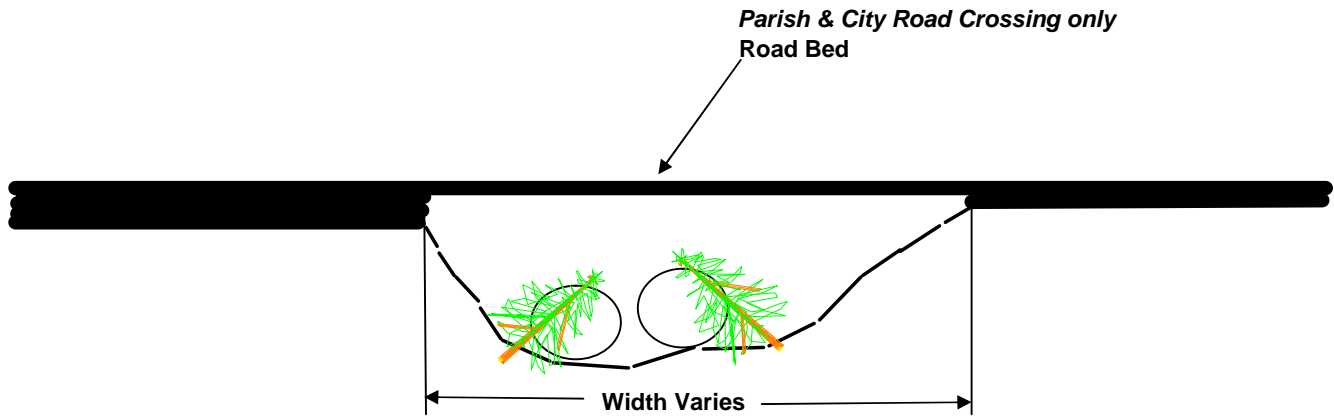

**Note:** Contract is to remove Debris from upstream and downstream Culverts which includes inside of culverts


**Exception:** All Crossing which cross State or Federal highways are not included in contract

## Typical Road Culvert type Crossing Not to Scale

Notice:

96 Hours Before Digging  
Call 1-800-272-3020

## Debris Removal

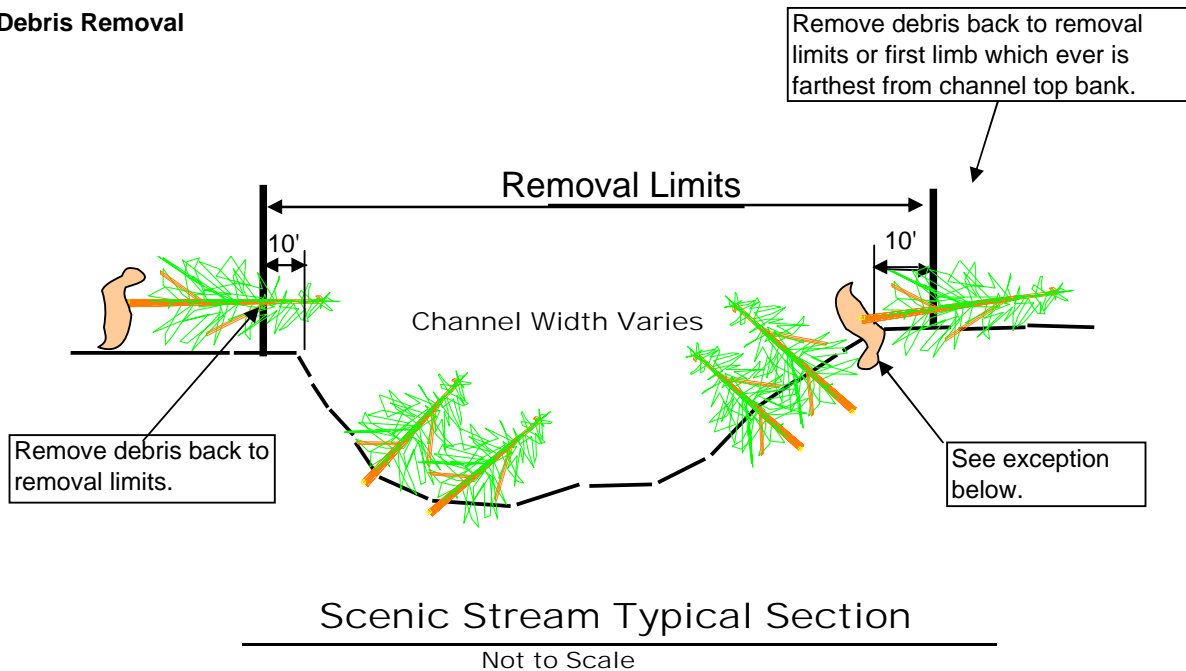

**Applies to working from either side**

Notice:


96 Hours Before Digging

Call 1-800-272-3020

**\*Note:** Work to be performed from within the channel with marsh buggy or barge mounted equipment where flotation is possible. Otherwise work from one side only, from 10' of top bank on the non-work side to 25' from top bank on the work side.

**Exception.** Only rootballs that have been totally dislodged from the stream bank shall be removed and disposed of as per specification.

## Debris Removal

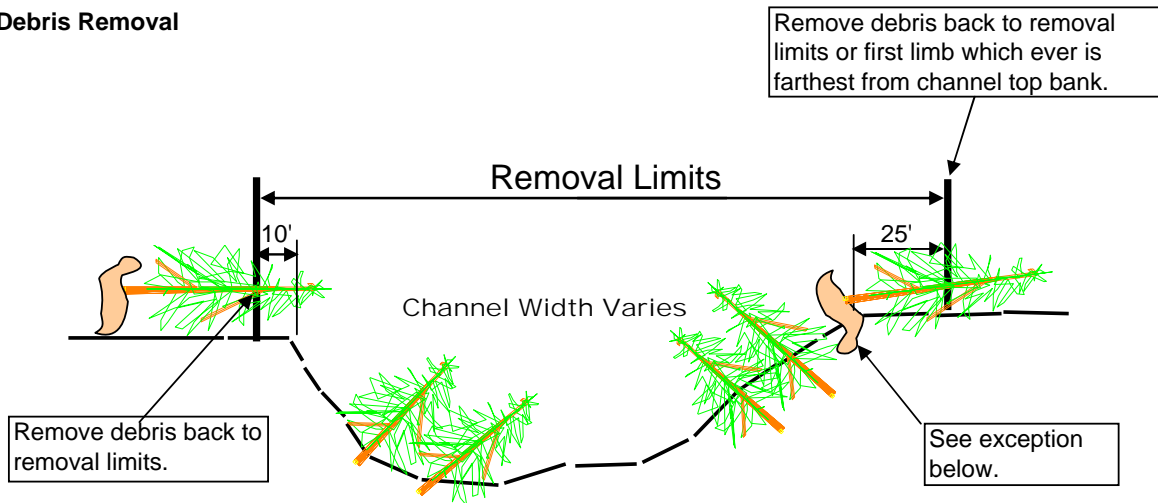

### Scenic Stream Typical Section

Not to Scale

Applies to working from either side

Notice:

96 Hours Before Digging

Call 1-800-272-3020

**\*Note:** Access can be obtained from either side; however work will only be performed from one side in any stretch of the channel, as concurred in by COTR.

**Exception.** Only rootballs that have been totally dislodged from the stream bank shall be removed and disposed of as per specification.